


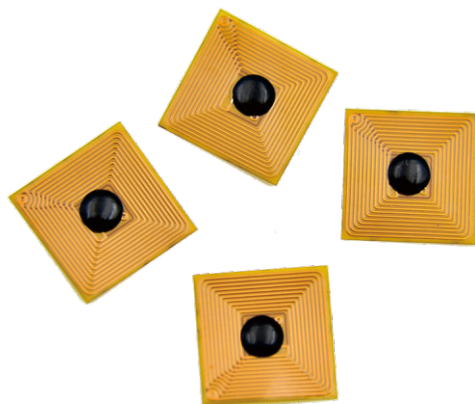

Nanova Cube

10 x 10 mm NXP Icode slx2

RFID FPC tags are thin, lightweight, and highly flexible transponders made from flexible printed circuits. They conform easily to curved or irregular surfaces, ensuring reliable performance without affecting product appearance. Ideal for electronics, smart devices, apparel, and packaging, these tags provide stable data transmission, durability, and easy integration into compact or space-limited applications.

Compared to standard etched aluminum antenna tags, these FPC NFC tags offer superior structural robustness and higher temperature resistance.

As a result, they can be flexibly integrated or overmolded into fine jewelry, high-value luxury assets, silicone bands and components, Bluetooth earphones, audio equipment, and various promotional gifts requiring embedded NFC capabilities.

Overview

Frequency Band
HF 13.56 MHz

Chip Type
NXP Icode slx2

Dimensions
10 x 10 mm / 0.39 x 0.39 in

Air Interface Protocol
ISO15693

Application
NFC wearable products
Electronic toys
Dangerous and safety items identification

Technical Features



Model	RCF2004
RFID Features	
Air Interface Protocol	ISO 15693
Frequency	13.56 MHz
Chip Type	NXP Icode slx2
Memory	2560 bits
Data Storage	> 10 years
Re-write	100,000 times
Read Range(13.56 MHZ)	40.0 mm
Physical Features	
Dimension	10 x 10 mm / 0.39 x 0.39 in
Material	FPC
Color	Yellow
Operating Temperature	-40°C to 85°C / -40°F to 185°F
Survival Temperature	-40°C to 200°C / -40°F to 392°F
Storage Condition	20±5°C, 50±10% RH, Store away from sunlight
IP Rate	IP68, test for 5 hours at 1m deep water
Other Features	
Installation	Adhesive(clean and dry surface)
Certifications	Reach, RoHS, CE
Package	Single or roll

PS: The performance is theoretical values in the lab and the actual effect depends on the specific applications.

RICHRFID

Web: <https://www.richrfid.com> E-mail: info@richrfid.com
 Shenzhen | Hong Kong | Singapore | Seoul | Tokyo | Paris



DISCLAIMER

All specifications are indicative and results may vary. Each user bears full responsibility for making its own determination as to the suitability of RICHRFID products, materials, services, recommendations, or advice for its own particular use.

For intended use only. Not to be repurposed or used for other applications without prior written permission from the manufacturer.

@2026 RICHRFID. All rights reserved.